

NAG Library Function Document

nag_gamma (s14aac)

1 Purpose

nag_gamma (s14aac) returns the value of the gamma function $\Gamma(x)$.

2 Specification

```
#include <nag.h>
#include <nags.h>
double nag_gamma (double x, NagError *fail)
```

3 Description

nag_gamma (s14aac) evaluates an approximation to the gamma function $\Gamma(x)$. The function is based on the Chebyshev expansion:

$$\Gamma(1+u) = \sum_{r=0}^l a_r T_r(t), \quad \text{where } 0 \leq u < 1, t = 2u - 1,$$

and uses the property $\Gamma(1+x) = x\Gamma(x)$. If $x = N + 1 + u$ where N is integral and $0 \leq u < 1$ then it follows that:

$$\text{for } N > 0, \quad \Gamma(x) = (x-1)(x-2)\cdots(x-N)\Gamma(1+u),$$

$$\text{for } N = 0, \quad \Gamma(x) = \Gamma(1+u),$$

$$\text{for } N < 0, \quad \Gamma(x) = \frac{\Gamma(1+u)}{x(x+1)(x+2)\cdots(x-N-1)}.$$

There are four possible failures for this function:

- (i) if x is too large, there is a danger of overflow since $\Gamma(x)$ could become too large to be represented in the machine;
- (ii) if x is too large and negative, there is a danger of underflow;
- (iii) if x is equal to a negative integer, $\Gamma(x)$ would overflow since it has poles at such points;
- (iv) if x is too near zero, there is again the danger of overflow on some machines. For small x , $\Gamma(x) \simeq 1/x$, and on some machines there exists a range of nonzero but small values of x for which $1/x$ is larger than the greatest representable value.

4 References

Abramowitz M and Stegun I A (1972) *Handbook of Mathematical Functions* (3rd Edition) Dover Publications

5 Arguments

1: **x** – double

Input

On entry: the argument x of the function.

Constraint: **x** must not be zero or a negative integer.

2: **fail** – NagError *

Input/Output

The NAG error argument (see Section 2.7 in How to Use the NAG Library and its Documentation).

6 Error Indicators and Warnings

NE_ALLOC_FAIL

Dynamic memory allocation failed.

See Section 2.3.1.2 in How to Use the NAG Library and its Documentation for further information.

NE_INTERNAL_ERROR

An internal error has occurred in this function. Check the function call and any array sizes. If the call is correct then please contact NAG for assistance.

An unexpected error has been triggered by this function. Please contact NAG.

See Section 2.7.6 in How to Use the NAG Library and its Documentation for further information.

NE_NO_LICENCE

Your licence key may have expired or may not have been installed correctly.

See Section 2.7.5 in How to Use the NAG Library and its Documentation for further information.

NE_REAL_ARG_GT

On entry, $x = \langle value \rangle$.

Constraint: $x \leq \langle value \rangle$.

The argument is too large, the function returns the approximate value of $\Gamma(x)$ at the nearest valid argument.

NE_REAL_ARG_LT

On entry, $x = \langle value \rangle$. The function returns zero.

Constraint: $x \geq \langle value \rangle$.

The argument is too large and negative, the function returns zero.

NE_REAL_ARG_NEG_INT

On entry, $x = \langle value \rangle$.

Constraint: x must not be a negative integer.

The argument is a negative integer, at which values $\Gamma(x)$ is infinite. The function returns a large positive value.

NE_REAL_ARG_TOO_SMALL

On entry, $x = \langle value \rangle$.

Constraint: $|x| \geq \langle value \rangle$.

The argument is too close to zero, the function returns the approximate value of $\Gamma(x)$ at the nearest valid argument.

7 Accuracy

Let δ and ϵ be the relative errors in the argument and the result respectively. If δ is somewhat larger than the *machine precision* (i.e., is due to data errors etc.), then ϵ and δ are approximately related by:

$$\epsilon \simeq |x\Psi(x)|\delta$$

(provided ϵ is also greater than the representation error). Here $\Psi(x)$ is the digamma function $\frac{\Gamma'(x)}{\Gamma(x)}$.

Figure 1 shows the behaviour of the error amplification factor $|x\Psi(x)|$.

If δ is of the same order as *machine precision*, then rounding errors could make ϵ slightly larger than the above relation predicts.

There is clearly a severe, but unavoidable, loss of accuracy for arguments close to the poles of $\Gamma(x)$ at negative integers. However relative accuracy is preserved near the pole at $x = 0$ right up to the point of failure arising from the danger of overflow.

Also accuracy will necessarily be lost as x becomes large since in this region

$$\epsilon \simeq \delta x \ln x.$$

However since $\Gamma(x)$ increases rapidly with x , the function must fail due to the danger of overflow before this loss of accuracy is too great. (For example, for $x = 20$, the amplification factor $\simeq 60$.)

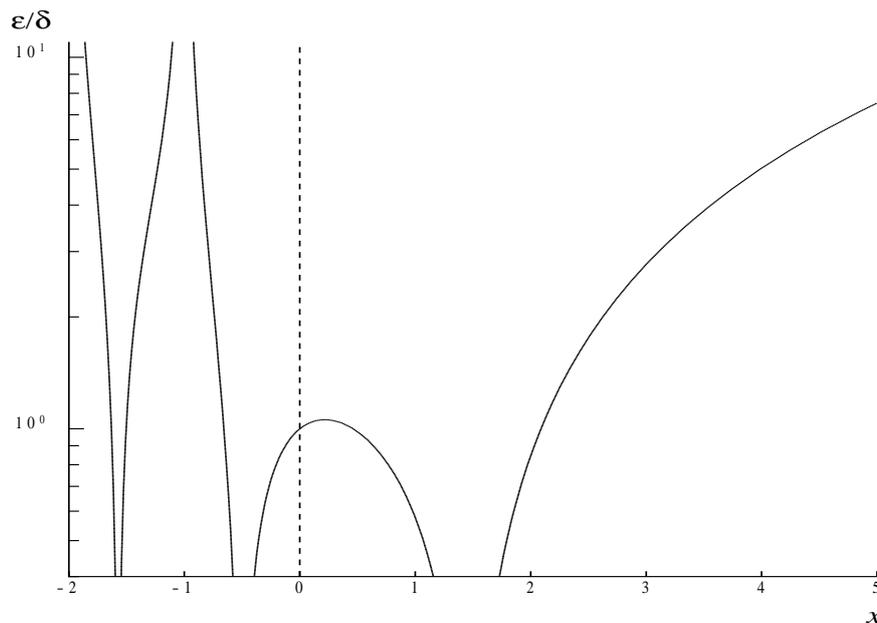


Figure 1

8 Parallelism and Performance

nag_gamma (s14aac) is not threaded in any implementation.

9 Further Comments

None.

10 Example

This example reads values of the argument x from a file, evaluates the function at each value of x and prints the results.

10.1 Program Text

```
/* nag_gamma (s14aac) Example Program.
 *
 * NAGPRODCODE Version.
 *
 * Copyright 2016 Numerical Algorithms Group.
 *
 * Mark 26, 2016.
 */
#include <nag.h>
```

```

#include <stdio.h>
#include <nag_stdlib.h>
#include <nags.h>

int main(void)
{
  Integer exit_status = 0;
  double x, y;
  NagError fail;

  INIT_FAIL(fail);

  /* Skip heading in data file */
#ifdef _WIN32
  scanf_s("%*[\n]");
#else
  scanf("%*[\n]");
#endif
  printf("nag_gamma (s14aac) Example Program Results\n");
  printf("      x              y\n");
#ifdef _WIN32
  while (scanf_s("%lf", &x) != EOF)
#else
  while (scanf("%lf", &x) != EOF)
#endif
  {
    /* nag_gamma (s14aac).
     * Gamma function Gamma(x)
     */
    y = nag_gamma(x, &fail);
    if (fail.code != NE_NOERROR) {
      printf("Error from nag_gamma (s14aac).\n%s\n", fail.message);
      exit_status = 1;
      goto END;
    }
    printf("%12.3e%12.3e\n", x, y);
  }

END:
  return exit_status;
}

```

10.2 Program Data

```

nag_gamma (s14aac) Example Program Data
      1.0
      1.25
      1.5
      1.75
      2.0
      5.0
      10.0
     -1.5

```

10.3 Program Results

```

nag_gamma (s14aac) Example Program Results
      x              y
  1.000e+00   1.000e+00
  1.250e+00   9.064e-01
  1.500e+00   8.862e-01
  1.750e+00   9.191e-01
  2.000e+00   1.000e+00
  5.000e+00   2.400e+01
  1.000e+01   3.629e+05
 -1.500e+00   2.363e+00

```

Example Program
Returned Values for the Gamma Function $\Gamma(x)$

